

Horus Plus 800


PN: PWUP-LI080H1-AZ01B

EAN: 6422956006426


The power keeper



LCD Touch Screen Display



Software Management



Automatic Voltage Regulator



★ Features

- ⊕ Touch screen LCD to display UPS information circularly
- ⊕ Excellent microprocessor control guarantees high reliability
- ⊕ Boost and buck AVR for voltage stabilization
- ⊕ Auto restart while AC is recovering
- ⊕ Simulated sine wave
- ⊕ Off-mode charging
- ⊕ Cold start function
- ⊕ Software Management (ViewPower)

📄 Specifications

Capacity	800 VA / 480 W	Alarm	
Type	Line Interactive	Battery Mode	Sounding every 10 seconds
Input		Low Battery	Sounding every second
Voltage	230 VAC	Overload	Sounding every 0.5 seconds
Voltage Range	160-280 VAC	Fault	Continuously sounding
Frequency Range	60/50 Hz (auto sensing)	Protection	
Output		Outlets type	2x Schuko RJ11 phone line/modem surge protection Battery Backup & Surge Protection
AC Voltage Regulation (Batt. Mode)	±10%	Full protection	Over/ under voltage protection Input spike protection, Overload, Discharge and Overcharge Protection
Frequency Range (Batt. Mode)	60 Hz or 50 Hz ±1 Hz	Humidity	0-90 % RH @ 0-40°C (non-condensing)
Transfer Time	Typical 2-6 ms	Noise Level	Less than 40dB
Waveform (Batt. Mode)	Simulated Sine Wave		
Indicators type			
LCD Display	Input voltage, output voltage, battery capacity, load level and UPS status		


Battery

Battery Type & Number	12V 9Ah x 1
Battery Voltage	12V
Typical Recharge Time	4-6 hours up to 90% capacity
Running time on battery (minutes)	25% Load - 22min 50% Load - 4min 75% Load - < 2 min 100% Load - < 1min

Management

Connection port	USB
Software capability	Monitor & Control over USB, LAN or Internet

Running time on battery Horus Plus 800

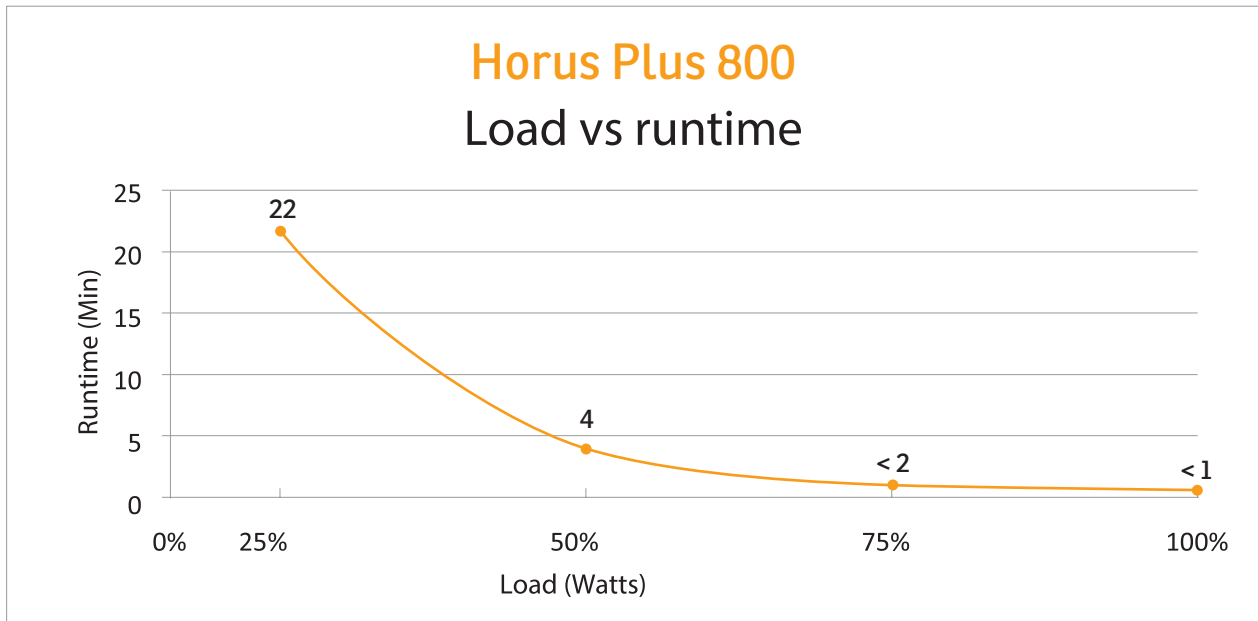

Logistics

Dimension (D x W x H)	300 x 101 x 142 mm
Carton Box Size	593 x 355 x 240 mm
Pieces in the Carton Box	4 pcs / ctn
Net & Gross weight / CTN	N.W. / G.W.: 20 kg / 22 kg

Certificates

